
Spectra — Ultrafabrics



Acoustical properties • Breathable technology



620-2720 Dark Sky

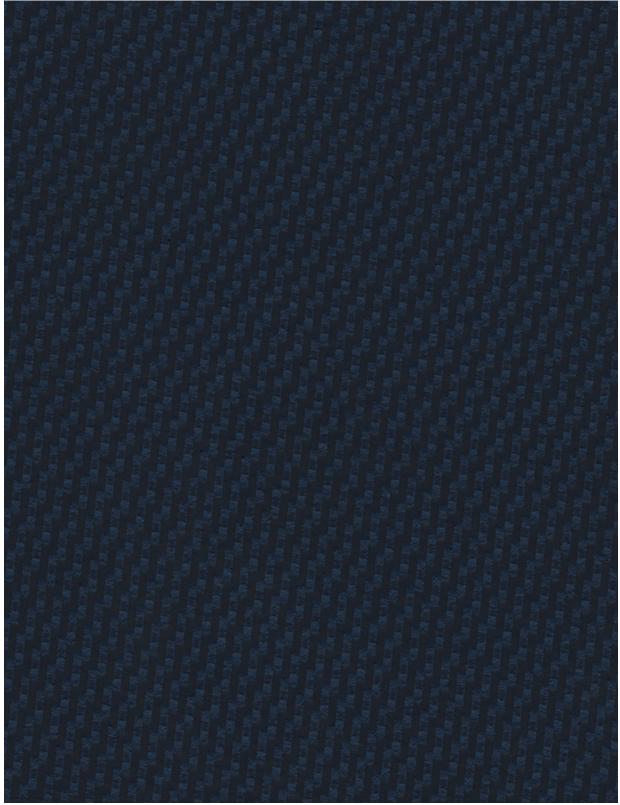





Spectra from Ultrafabrics

Application

Interior Upholstery

General Specifications

Composition:

100% Polycarbonate Polyurethane Surface 65% Polyester, 35% Rayon Backing

Weight:

Approx. 8.9 oz. Per Square Yard Approx. 300 Grams Per Square Metre

Thickness:

Approx. 0.95 Millimetres

Width:

54 Inches / 137 Centimetres

Repeat:

None

Performance

Abrasion:

ASTM D4157 / 300,000 Double Rubs (Wyzenbeek)* BS EN ISO 12947-2 / 80,000 Rubs (Martindale)* *meets or exceeds

Hydrolysis:

14+ Weeks

ASTM D3690 Sect. 6.11 (Hydrolytic Stability) ISO 1419 Method C (Accelerated Ageing)

Adhesion of Coating: ASTM D751 Tear Strength: **ASTM D2261** Breaking Strength: **ASTM D5034** Tensile Strength: BS EN ISO 1421 Air Permeability: ASTM D737 Sound Absorption: ASTM C423

Colorfastness

Light: AATCC 16.3, 200 Hours, Grade 4

ISO 105 B02, Grade 6

AATCC 8, Grade 4-5 Wet & Dry Crocking:

Flammability Requirements

· ASTM E84 (Adhered) - Class A

· CA TB 117 - Pass

• FMVSS 302 & 95/28 Annex IV - Pass

NFPA 260 - Class 1

• UFAC - Class 1

These fabrics, when treated and/or used with other compatible furniture components, have been shown to perform under the fire test conditions of:

ASTM E84 (Unadhered)

• BS EN 1021 Parts 1 & 2

• BS 5852 Source 0.1 & 5 (Cig, Match & Crib 5)

• IMO FTPC Part 8

For more information on certifications and standards, sustainability, as well as cleaning and care instructions, please visit our website.

* Only in North America



